

Piezo Shower Control SLS 01P, SLS 01NP



SLS 01P




SLS 01NP

Characteristics



- **hygienic flush**
- **vandal-proof**
- is destined for cold or premixed water
- water flows after soft push of the piezo button
- water stops flowing after adjustable flowing time (can be set in 10 s - 310 s), standard 120 s
- water could be stopped by follow-up soft push of piezo button
- monitoring of battery capacity (for models with index B)
- parameter adjustment using by the remote control SLD 04

Installation Drawing

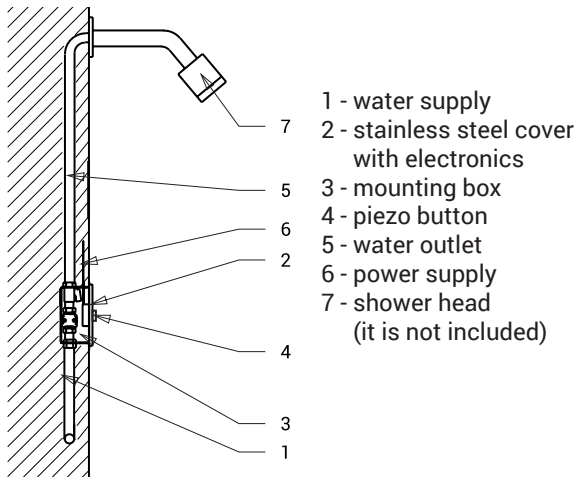

- 1 - water supply
- 2 - stainless steel cover with electronics
- 3 - mounting box
- 4 - piezo button
- 5 - water outlet
- 6 - power supply
- 7 - shower head (it is not included)

Technical Specification

Stainless steel cover dimension	170 x 170 x 10 mm
Mounting box dimension	140 x 140 x 75 mm
Operating voltage	
▪ SLS 01P, 01NP	24 V DC
▪ SLS 01PB, SLS 01NPB	6 V
Power input	
▪ by operating 24 V DC	7 W
▪ by operating 6 V	3 W
Battery life	
▪ 4 pcs. AA alkaline batteries	approx. 2 years
AA, 1,5 V, 2700 mAh	(100 uses per day)
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	12 l/min. (inf. data)
Water inlet	male thread G 3/4"
Water outlet	male thread G 3/4"

Supply Specification

SLS 01P - Supply No. 12012	stainless steel cover with electronics, plastic mounting box with brass screw coupling, electromagnetic valve and ball valve, 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh
SLS 01PB - Supply No. 12013	(SLS 01PB), waterproofing foil
SLS 01NP - Supply No. 22016	stainless steel cover with electronics, plastic mounting box with brass screw coupling, electromagnetic valve and ball valve, 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh
SLS 01NPB - Supply No. 22017	(SLS 01NPB), waterproofing foil

Recommended Accessories

SLZ 01Y - Supply No. 05012	power supply 24 V DC for operating of max. 5 pcs. of showers
SLZ 01Z - Supply No. 05011	power supply 24 V DC for operating of max. 9 pcs. of showers
SLZ 04Y - Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
SLZ 04Z - Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers
SLZ 04X - Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers
SLZ 06 - Supply No. 05060	power supply 24 V DC for operating of max. 1 pc. of shower
SLD 04 - Supply No. 07040	remote control for an adjustment of parameters
SLT 04 - Supply No. 09040	thermostatic valve 3/4", rate of flow 28 l/min by the pressure 0,1 MPa
SLT 05 - Supply No. 09050	thermostatic valve 1/2", rate of flow 42 l/min by the pressure 0,1 MPa
SLT 07 - Supply No. 09070	thermostatic valve 3/4", rate of flow 43 l/min by the pressure 0,1 MPa
SLT 08 - Supply No. 09080	thermostatic valve 1", rate of flow 53 l/min by the pressure 0,1 MPa
SLT 09 - Supply No. 09090	thermostatic valve 5/4", rate of flow 82 l/min by the pressure 0,1 MPa
SLT 10 - Supply No. 09100	thermostatic valve 6/4", rate of flow 155 l/min by the pressure 0,1 MPa
SLA 03 - Supply No. 06030	vandal-proof shower head with possibility to set an angle of water flow
SLA 13 - Supply No. 06130	vandal-proof shower head with possibility to set an angle of water flow
SLA 14 - Supply No. 06140	vandal-proof shower head
SLA 28 - Supply No. 06280	shower head
SLA 39 - Supply No. 06390	vandal-proof shower head
SLA 40 - Supply No. 06400	vandal-proof shower head with possibility to set an angle of water flow
SLA 36 - Supply No. 06360	set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B)