

Automatic Thermostatic Shower Control SLS 03S




Characteristics




- **hygienic flush**
- is destined for cold and hot water, temperature is regulated by thermostatic mixer
- with bottom outlet
- safety fuse against scalding
- water is flowing as long as an user is in the active range
- water stops flowing after the user leaves the active range sensor after adjustable time delay (can be set in range 0,25 - 7,75 s), standard 3 s
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03

Installation Drawing

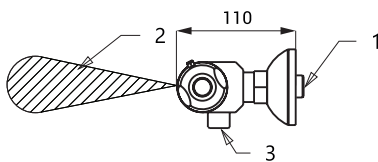

- 1 - water supply
- 2 - active range
- 3 - spout
- 4 - chrome body
- 5 - thermostatic mixer



SLS 03S

Technical Specification

Water inlet spacing	150 mm
Operating voltage	
▪ SLS 03S	24 V DC
▪ SLS 03SB	9 V
Power input	
▪ operating by 24 V DC	3 W
▪ operating by 9 V	2 W
Battery life	
▪ lithium 9 V, type U9VL	approx. 2 years (100 uses per day)
Active range	
▪ standard	0,6 - 0,75 m
▪ START/STOP program	0,05 - 0,15 m
Recommended flow pressure	0,1 - 0,6 MPa
Water inlet	male thread G 1/2"
Water outlet	male thread G 1/2"

Supply Specification

SLS 03S - Supply No. 02038	shower control with electronics, thermostat and electromagnetic valve, rosette (2 pcs.), chrome cover (2 pcs.), filter (2 pcs.), Alley key, lithium battery SLA 09 (SLS 03SB)
SLS 03SB - Supply No. 22031	

Recommended Accessories

SLZ 01Y - Supply No. 05012	power supply 24 V DC for operating of max. 10 pcs. of showers
SLZ 01Z - Supply No. 05011	power supply 24 V DC for operating of max. 20 pcs. of showers
SLZ 04Y - Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 10 pcs. of showers
SLZ 04Z - Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 20 pcs. of showers
SLZ 04X - Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 33 pcs. of showers
SLD 03 - Supply No. 07030	remote control for an adjustment of parameters
SLA 09 - Supply No. 06090	lithium battery 9 V/1200 mAh, type U9VL (for models with index B)